


## Ultra low clamping single line bidirectional ESD protection



0201 package



### Features

- Ultra low clamping voltage: 8 V (IEC 61000-4-2 contact discharge 8 kV at 30 ns/ 16 A TLP)
- Bidirectional device
- Low leakage current
- 0201 package
- ECOPACK2 compliant component
- Complies with IEC 61000-4-2 level 4
  - $\pm 30$  kV (air discharge)
  - $\pm 20$  kV (contact discharge)

### Applications

Where transient over voltage protection in ESD sensitive equipment is required, such as:

- Smartphones, mobile phones and accessories
- Tablets and notebooks
- Portable multimedia devices and accessories
- Wearable, home automation, healthcare
- Highly integrated systems

#### Product status

ESDZV5-1BU2

### Description


The **ESDZV5-1BU2** is a bidirectional single line TVS diode designed to protect the data line or other I/O ports against ESD transients.

The device is ideal for applications where reduced line capacitance and board space saving are required.

# 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_{amb} = 25\text{ °C}$ )**

Symbol	Parameter		Value	Unit
$V_{PP}$	Peak pulse voltage	IEC 61000-4-2 contact discharge	20	kV
		IEC 61000-4-2 air discharge	30	
$P_{PP}$	Peak pulse power dissipation (8/20 $\mu$ s)		70	W
$I_{PP}$	Peak pulse current (8/20 $\mu$ s)		7	A
$T_j$	Operating junction temperature range		-55 to +150	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature range		-65 to +150	$^{\circ}\text{C}$
$T_L$	Maximum lead temperature for soldering during 10 s		260	$^{\circ}\text{C}$

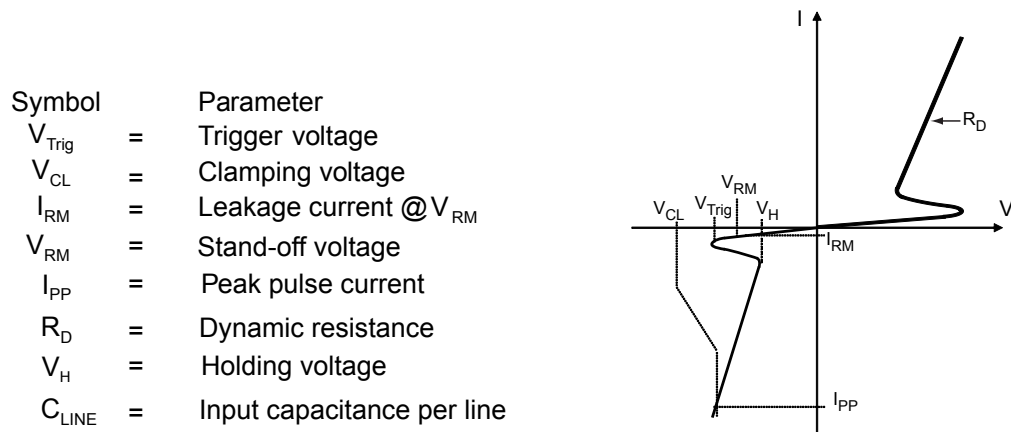
**Figure 1. Electrical characteristics (definitions)**

**Table 2. Electrical characteristics ( $T_{amb} = 25\text{ °C}$ )**

Symbol	Test condition	Min.	Typ.	Max.	Unit
$V_{Trig}$	Higher voltage than $V_{Trig}$ guarantees the protection turn-on	5.8		10	V
$V_H$	Lower voltage than $V_H$ guarantees the protection turn-off	4	4.7		V
$V_{RM}$				5.5	V
$I_{RM}$	$V_{RM} = 5.5\text{ V}^{(1)}$		10	50	nA
$V_{CL}$	8 kV contact discharge after 30 ns, IEC 61000-4-2		8		V
$V_{CL}$	8/20 $\mu$ s waveform, $I_{PP} = 7\text{ A}$			9	V
$C_{LINE}$	$F = 1\text{ MHz}$ , $V_{LINE} = 0\text{ V}$ , $V_{OSC} = 30\text{ mV}$		6	7.5	pF
$R_D$	Pulse duration 100 ns		0.13		$\Omega$


1. Application note: when used to protect a line connected to a DC source, the DC voltage must be lower than the minimum  $V_H$  to enable the diode to return to its non-conducting state after the transient.

## 1.1 Characteristics (curves)

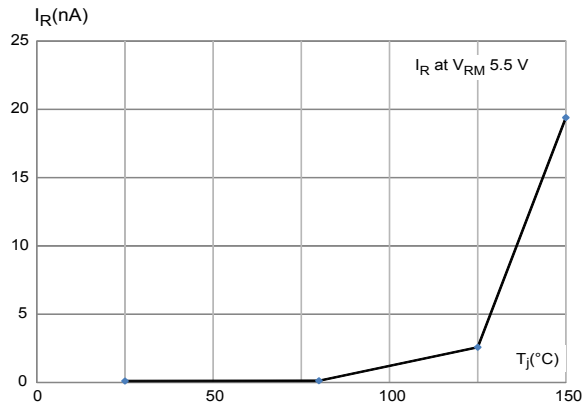
**Figure 2. Leakage current versus junction temperature (typical values)**




**Figure 3. Junction capacitance versus applied voltage (typical values)**

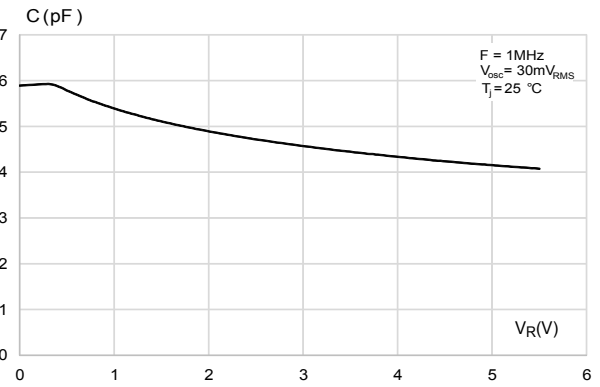


**Figure 4. ESD response to IEC 61000-4-2 (+8 kV contact discharge)**

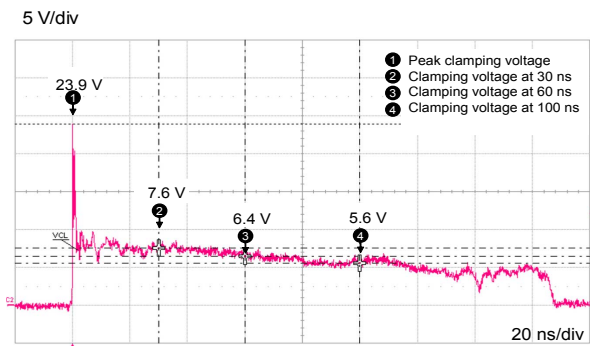

**Figure 5. ESD response to IEC 61000-4-2 (-8 kV contact discharge)**

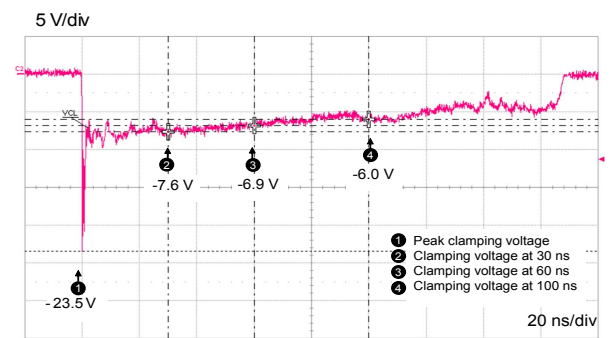

**Figure 6. Positive TLP characteristic**

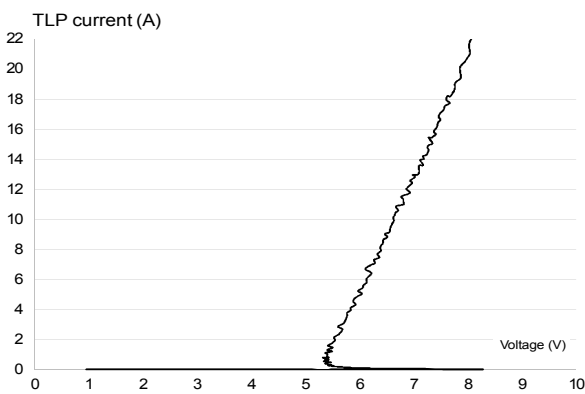

**Figure 7. Negative TLP characteristic**


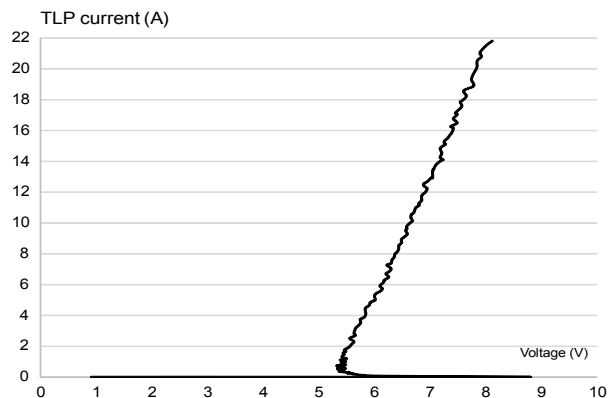


Figure 8. S<sub>21</sub> attenuation measurement result

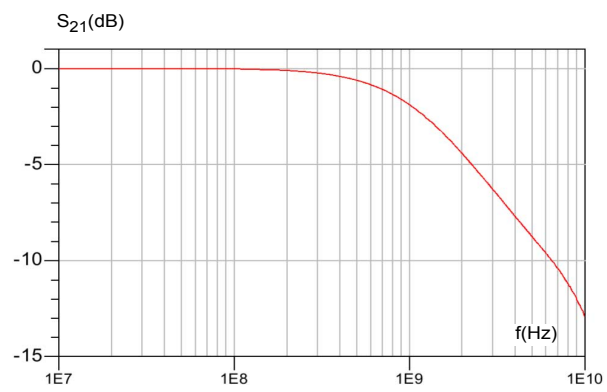


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 ST0201 package information

Figure 9. ST0201 package outline

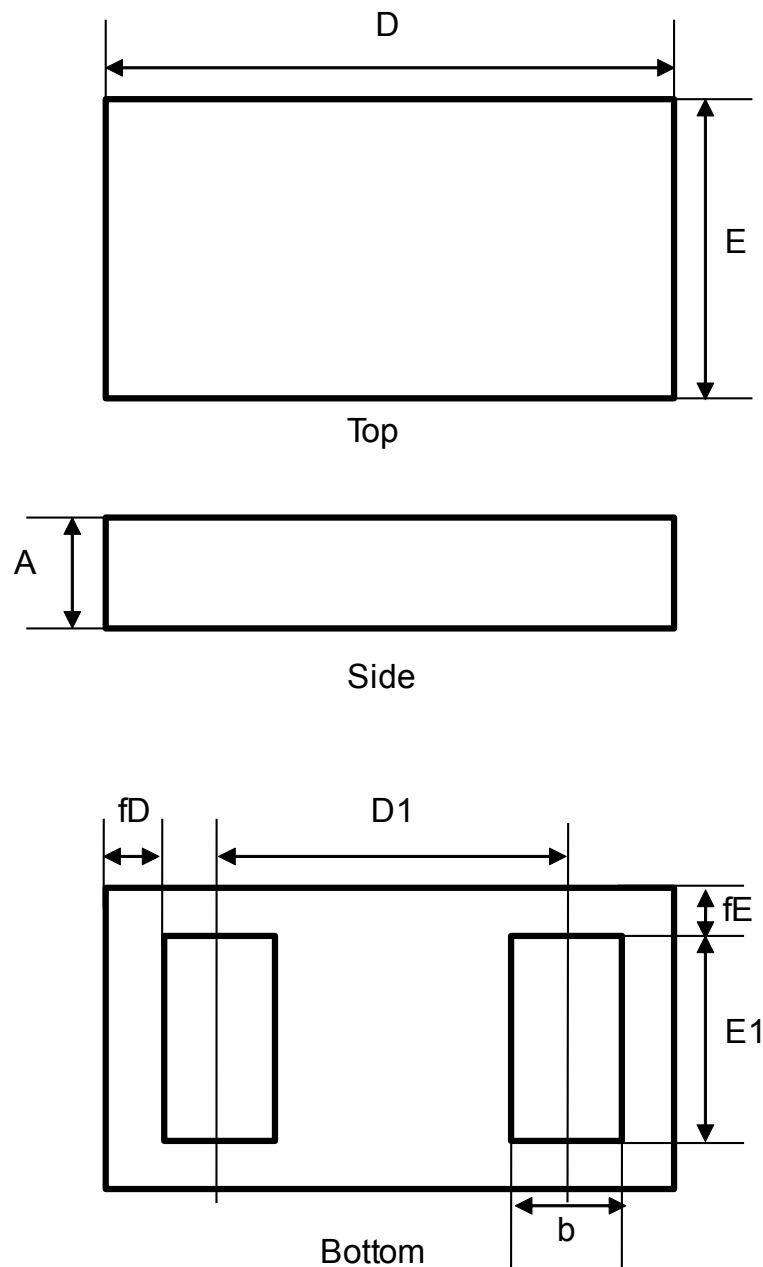


*Note: The marking codes can be rotated by 90 ° or 180° to differentiate assembly location. In no case should this product marking be used to orient the component for its placement on a PCB. Only pin 1 mark is to be used for this purpose.*

**Table 3. ST0201 package mechanical data**


Ref.	Dimensions		
	Millimeters		
	Min.	Typ.	Max.
A	0.210	0.240	0.270
b	0.140	0.170	0.200
D	0.550	0.580	0.610
D1		0.330	
E	0.250	0.280	0.310
E1	0.170	0.200	0.230
fD		0.040	
fE		0.040	

**Figure 10. Marking**

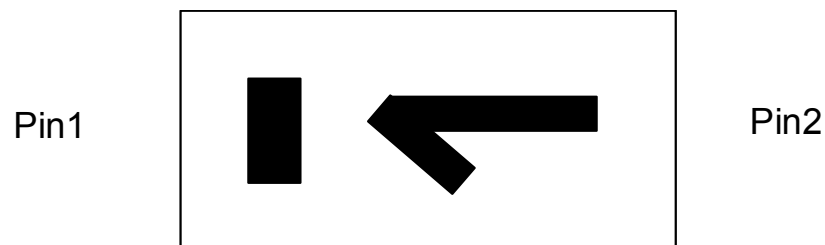

*Note: Product marking may be rotated by multiples of 90° for assembly plant differentiation. In no case should this product marking be used to orient the component for its placement on a PCB. Only pin 1 mark is to be used for this purpose.*

Figure 11. Tape and reel specification (in mm)

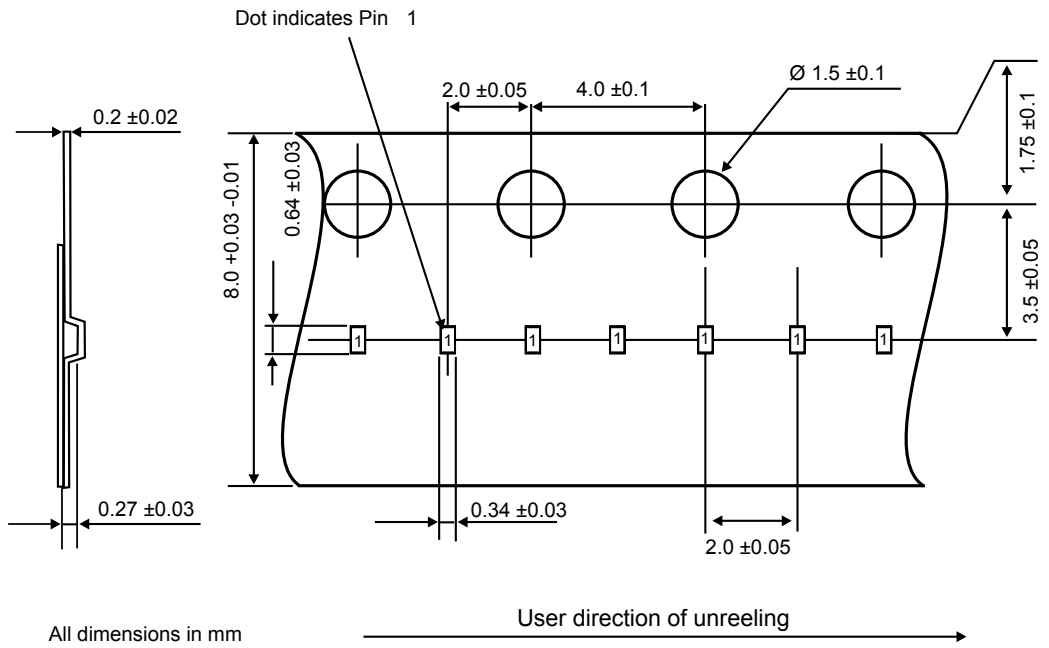


### 3 Recommendation on PCB assembly

#### 3.1 Footprint

1. Footprint in mm
  - a. SMD footprint design is recommended.
  - b. Underfill material like Namics 8410-73C or equivalent needed.


Figure 12. Footprint in mm

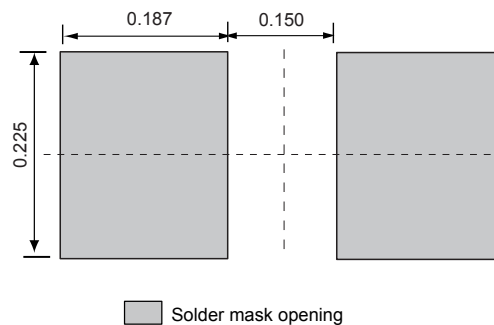

#### 3.2 Stencil opening design

1. Reference design
  - a. Stencil opening thickness: 75  $\mu\text{m}$  / 3 mils
  - b. Stencil aperture ratio : 100%

Figure 13. Recommended stencil window position in mm

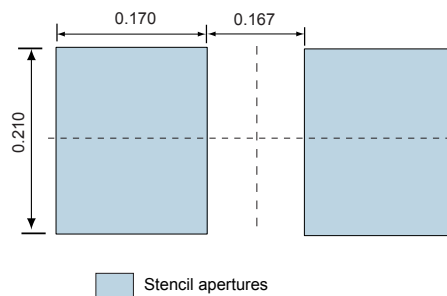

#### 3.3 Solder paste

1. Halide-free flux qualification ROL0 according to ANSI/J-STD-004.
2. "No clean" solder paste is recommended.
3. Offers a high tack force to resist component movement during high speed.
4. Use solder paste with fine particles: powder particle size 20-38  $\mu\text{m}$ .



### 3.4 Placement


1. Manual positioning is not recommended.
2. It is recommended to use the lead recognition capabilities of the placement system, not the outline centering
3. Standard tolerance of  $\pm 0.05$  mm is recommended.
4. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
5. To improve the package placement accuracy, a bottom side optical control should be performed with a high resolution tool.
6. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

### 3.5 PCB design preference

1. To control the solder paste amount, the closed via is recommended instead of open vias.
2. The position of tracks and open vias in the solder area should be well balanced. A symmetrical layout is recommended, to avoid any tilt phenomena caused by asymmetrical solder paste due to solder flow away.

### 3.6 Reflow profile

Figure 14. ST ECOPACK<sup>®</sup> recommended soldering reflow profile for PCB mounting

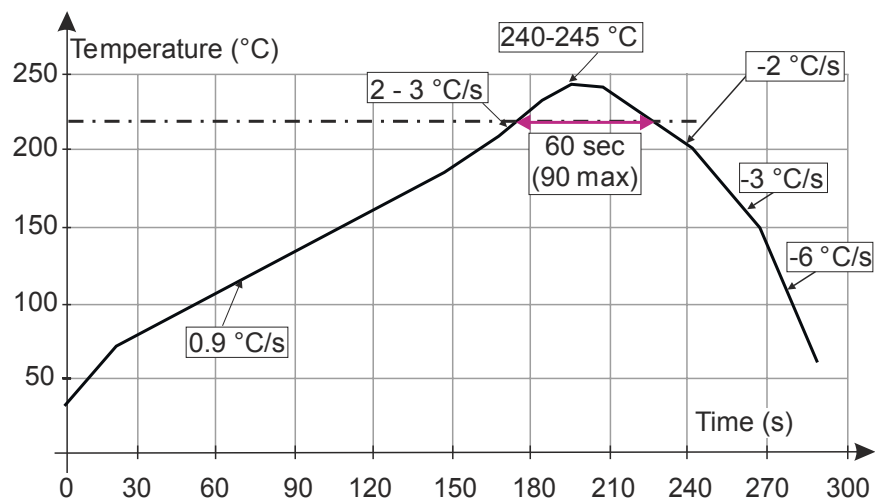

Note: Minimize air convection currents in the reflow oven to avoid component movement. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.

## 4 ESDZV5-1BU2\_Ordering information

Figure 15. Ordering information scheme

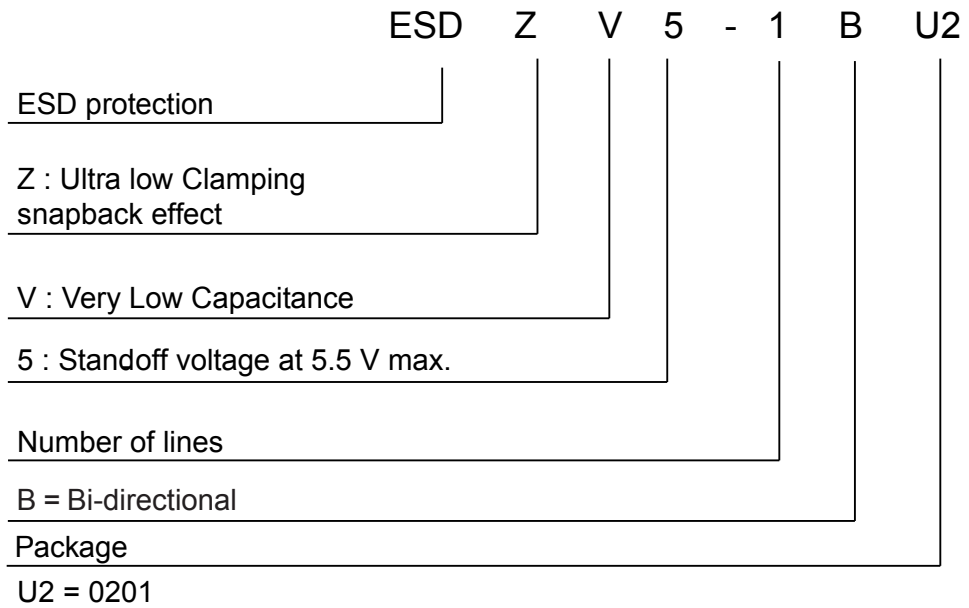


Table 4. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
ESDZV5-1BU2	1 <sup>(1)</sup>	0201	0.116 mg	15000	Tape and reel

1. The marking can be rotated by multiples of 90° to differentiate assembly location

## Revision history

**Table 5. Document revision history**

Date	Revision	Changes
28-Aug-2017	1	First issue.
20-Feb-2018	2	Updated <a href="#">Figure 10</a> .
25-Mar-2020	3	Updated <a href="#">Figure 9</a> , <a href="#">Table 3</a> and <a href="#">Figure 10</a> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved